



Performance Curves

SolidC-4, 50 Hz

Motor: **1500 rpm. synchr.**
 Tolerance: $\pm 8\%$ for Q
 $\pm 6\%$ for H
 Impeller, Max. dia.: 250 mm
 Impeller, Min. dia.: 200 mm
 Pump inlet, Dia.: 76 mm, DN 80
 Pump outlet, Dia.: 51 mm, DN 50

Performance data refer to water at 20°C.

NOTE!

The curves refer to motor: 4 kW, 1455 rpm. asynchr., 50 Hz.

For smaller motors, reduce head (H) with: 3%.

DO NOT FORGET THE SAFETY FACTOR.

Motor: **3000 rpm. synchr.**
 Tolerance: $\pm 8\%$ for Q
 $\pm 6\%$ for H
 Impeller, Max. dia.: 250 mm
 Impeller, Min. dia.: 200 mm
 Pump inlet, Dia.: 76 mm, DN 80
 Pump outlet, Dia.: 51 mm, DN 50





Performance data refer to water at 20°C.

NOTE!

The curves refer to motor: 22 kW, 2955 rpm. asynchr., 50 Hz.

For smaller motors, reduce head (H) with: 3%.

DO NOT FORGET THE SAFETY FACTOR.

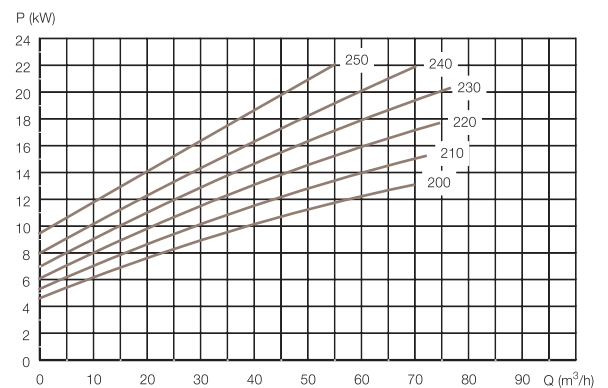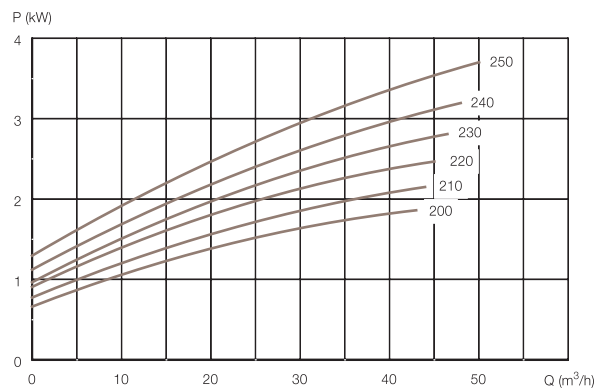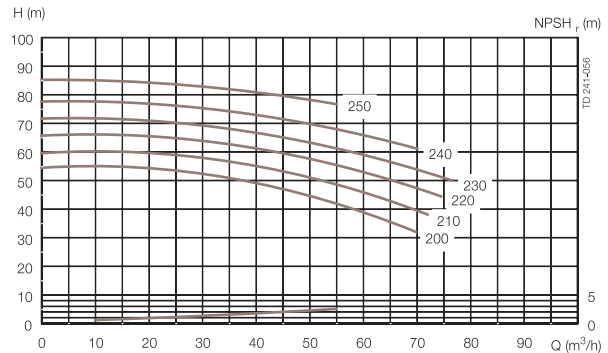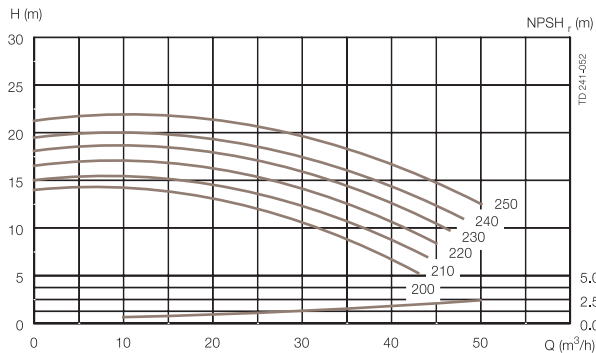

The information contained herein is correct at the time of issue, but may be subject to change without prior notice.

How to contact Alfa Laval

Contact details for all countries are continually updated on our website. Please visit www.alfalaval.com to access the information direct.