



Performance Curves

SolidC-4, 60 Hz

Motor: **1800 rpm. synchr.**
 Tolerance: $\pm 8\%$ for Q
 $\pm 6\%$ for H
 Impeller, Max. dia.: 250 mm
 Impeller, Min. dia.: 200 mm
 Pump inlet, Dia.: 76 mm, DN 80
 Pump outlet, Dia.: 51 mm, DN 50

Performance data refer to water at 20°C.

NOTE!

The curves refer to motor: 6.8 kW, 1770 rpm. asynchr., 60 Hz.

For smaller motors, reduce head (H) with: 3%.

DO NOT FORGET THE SAFETY FACTOR.

Motor: **3600 rpm. synchr.**
 Tolerance: $\pm 8\%$ for Q
 $\pm 6\%$ for H
 Impeller, Max. dia.: 250 mm
 Impeller, Min. dia.: 200 mm
 Pump inlet, Dia.: 76 mm, DN 80
 Pump outlet, Dia.: 51 mm, DN 50





Performance data refer to water at 20°C.

NOTE!

The curves refer to motor: 25 kW, 3555 rpm. asynchr., 60 Hz.

For smaller motors, reduce head (H) with: 3%.

DO NOT FORGET THE SAFETY FACTOR.

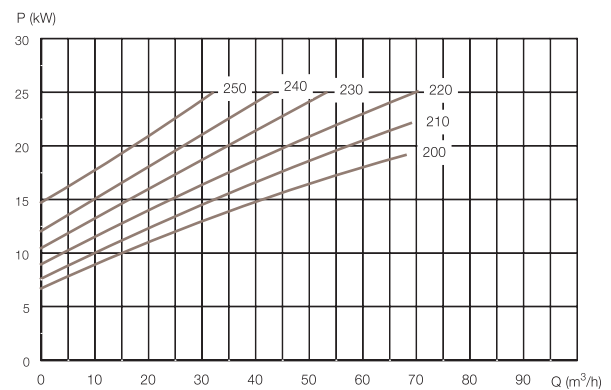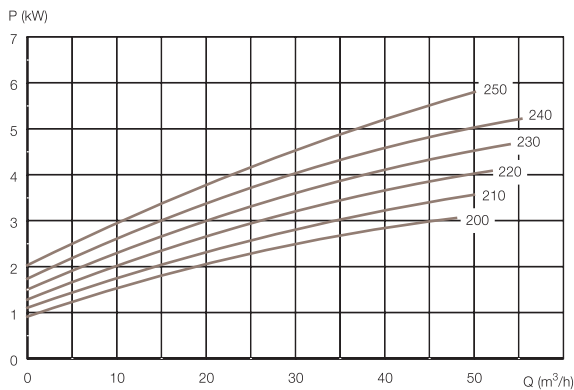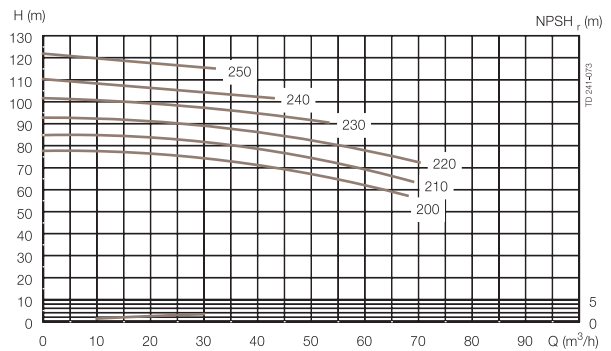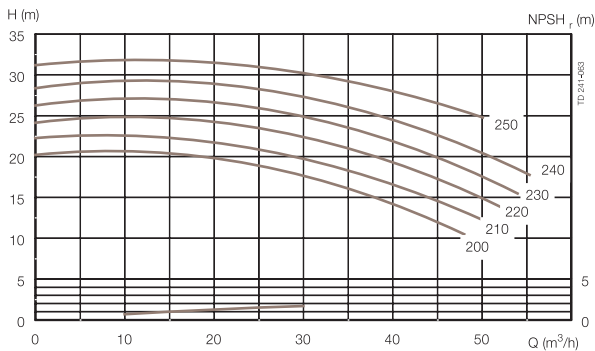

The information contained herein is correct at the time of issue, but may be subject to change without prior notice.

How to contact Alfa Laval

Contact details for all countries are continually updated on our website. Please visit www.alfalaval.com to access the information direct.